



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

H01M 8/24

A2

(11) International Publication Number:

WO 97/39490

(43) International Publication Date:

23 October 1997 (23.10.97)

(21) International Application Number: PCT/US97/04839

(22) International Filing Date: 25 March 1997 (25.03.97)

(30) Priority Data:

08/631,432

12 April 1996 (12.04.96)

US

(71) Applicant: ZTEK CORPORATION [US/US]; 460 Totten Pond Road, Waltham, MA 02154 (US).

(72) Inventors: HSU, Michael, S.; Round Hill Road, Lincoln, MA 01773 (US). HOAG, Ethan, D.; 177 Webster Street, East Boston, MA 02128 (US).


(74) Agents: LAURENTANO, Anthony, A. et al.; Lahive & Cockfield, L.L.P., 28 State Street, Boston, MA 02109 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: THERMALLY ENHANCED COMPACT REFORMER

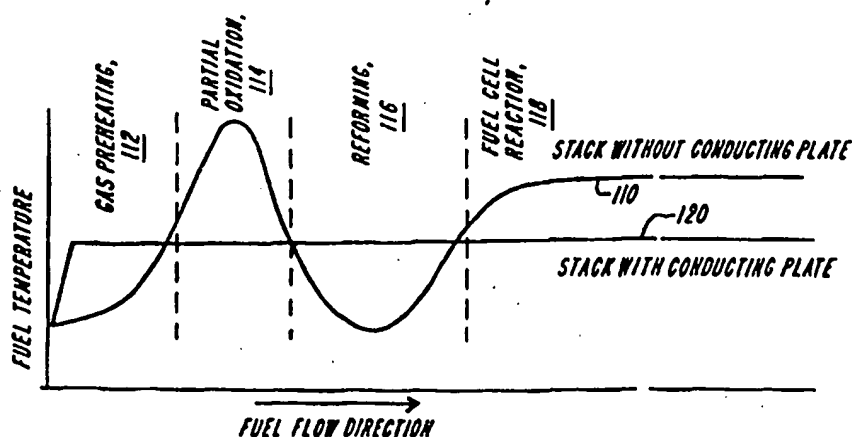

(57) Abstract

A natural gas reformer (10) comprising a stack of thermally conducting plates (12) interspersed with catalyst plates (14) and provided with internal or external manifolds for reactants. The catalyst plate is in intimate thermal contact with the conducting plates so that its temperature closely tracks the temperature of the thermally conducting plate, which can be designed to attain a near isothermal state in-plane to the plate. One or more catalysts may be used, distributed along the flow direction, in-plane to the thermally conducting plate, in a variety of optional embodiments. The reformer may be operated as a steam reformer or as a partial oxidation reformer. When operated as a steam reformer, thermal energy for the (endothermic) steam reforming reaction is provided externally by radiation and/or conduction to the thermally conducting plates. This produces carbon monoxide, hydrogen, steam and carbon dioxide. When operated as a partial oxidation reformer, a fraction of the natural gas is oxidized assisted by the presence of a combustion catalyst and reforming catalyst. This produces carbon monoxide, hydrogen, steam and carbon dioxide. Because of the intimate thermal contact between the catalyst plate and the conducting plates, no excessive temperature can develop within the stack assembly. Details of the plate design may be varied to accommodate a variety of manifolding embodiments providing one or more inlets and exit ports for introducing, pre-heating and exhaust the reactants.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

THERMALLY ENHANCED COMPACT REFORMER

Background of the Invention

5 The present invention relates to reformers, and particularly to reforming apparatus that reforms fuel into fuel species suitable for use by electrochemical converters. In particular it relates to a plate type reformer suitable for either steam reforming or partial oxidation reforming.

10 The use of conventional hydrocarbon fuels as a fuel reactant for fuel cells is well known in the art. The hydrocarbon fuels are typically pre-processed and reformed into simpler reactants prior to introduction to the electrochemical converter. Conventionally, the fuel is pre-processed by passing the hydrocarbon fuel first through a desulfurization unit, then through a reformer, and a shift reactor (for H_2 fueled fuel cell only) to produce a suitable fuel stock.

15 Conventional steam reformers currently in wide commercial use comprise a reformer section consisting of a catalyst material which promotes the reforming reaction and a burner to supply heat for the endothermic reforming reaction. A steam source is typically connected to the reformer section to provide steam. The burner typically operates at temperatures well above that required by the reforming reaction and well above the operating temperatures of conventional fuel cells, e.g.,
20 solid oxide fuel cells. Because of this, the burner must be operated as a separate unit independent of the fuel cell and as such adds considerable bulk, weight, cost and complexity to the overall power system. Furthermore, the burner is not uniquely adaptable to utilize the waste heat generally available from the fuel cell. Moreover, the consumption of extra fuel by the burner limits the efficiency of the power
25 system.

A typical tubular reformer contains multiple tubes, which are normally made of refractory metal alloys. Each tube contains a packed granular or pelletized material having a suitable reforming catalyst as a surface coating. The tube diameter typically varies from between 9 cm and 16 cm, and the heated length of the tube is
30 normally between 6 and 12 meters. A combustion zone is provided external to the tubes, and is typically formed in the burner. The tube surface temperature is maintained by the burner in the range of 900°C to ensure that the hydrocarbon fuel flowing inside the tube is properly catalyzed with steam at a temperature between 500°C and 700°C. This traditional tube reformer relies upon conduction and
35 convection heat transfer within the tube to distribute heat for reforming.

Plate-type reformers are known in the art, an example of which is shown and described in U.S. Patent No. 5,015,444 of Koga *et al.* The reformer described therein has alternating flat gap spaces for fuel/steam mixture flow and fuel/air mixture flow. The combustion of the fuel/air stream within the spaces provides the heat for reforming of the fuel/steam mixture stream. A drawback of this design is that the reformer relies upon heat transfer between the adjacent flat gap spaces to promote the fuel reforming process.

U.S. Patent No. 5,470,670 of Yasumoto *et al.* describes an integrated fuel cell/reformer structure, which has alternating layers of fuel cell and reformer plates. The heat transfer from the exothermic fuel cell to the endothermic reformer occurs through the thickness of the separating plates. A drawback of this design is that it is difficult to attain, if at all, temperature uniformities in this fuel cell/reformer structure, and which is essential in compact and efficient chemical or electrochemical apparatus designs. This fuel cell/reformer structure also requires complex and cumbersome reactant manifolding to interconnect the reactant flows between the alternating fuel cell layers and the reformer layers.

Electrochemical converters, such as fuel cells, have been known as systems for converting chemical energy derived from fuel stocks directly into electrical energy through electrochemical reaction. One type of fuel cell typically employed in fuel cell power generation systems is a solid oxide fuel cell. The solid oxide fuel cell generates electricity and releases waste heat at a temperature of about 1000°C.

A typical fuel cell consists mainly of a series of electrolyte units, onto which fuel and oxidizer electrodes are attached, and a similar series of interconnectors disposed between the electrolyte units to provide serial electrical connections. Electricity is generated between the electrodes across the electrolyte by an electrochemical reaction that is triggered when a fuel, e.g., hydrogen, is introduced at the fuel electrode and an oxidant, e.g., oxygen, is introduced at the oxidizer electrode.

Typically, the electrolyte is an ionic conductor having low ionic resistance thereby allowing the transport of an ionic species from one electrode-electrolyte interface to the opposite electrode-electrolyte interface under the operating conditions of the converter. The electrical current can be tapped for external load from the interconnector plates.

The conventional solid oxide fuel cell also includes, in addition to the features listed above, an electrolyte having a porous fuel and oxidizer electrode material applied on opposing sides of the electrolyte. The electrolyte is typically an oxygen ion

conducting material, such as stabilized zirconia. The oxidizer electrode, which is typically maintained in an oxidizing atmosphere, is usually an perovskite of high electrical conductivity, such as strontium doped lanthanum manganite ($\text{LaMnO}_3(\text{Sr})$). The fuel electrode is typically maintained in a fuel rich or reducing atmosphere and is
5 usually a cermet such as zirconia-nickel (ZrO_2/Ni). The interconnector plate of the solid oxide fuel cell typically is made of an electronically conducting material which is stable in both an oxidizing and reducing atmosphere.

There still exists a need in the art for apparatus that utilizes the waste heat generated by the fuel cell for reforming use. In particular, there exists a need for
10 employing reformer design in close association with the electrochemical converters.

The invention will next be described in connection with certain preferred embodiments. However, it should be clear that various changes and modifications can be made by those skilled in the art without departing from the spirit and scope of the invention.

15

Summary of the Invention

It is an object of the present invention to provide a plate-type reformer which has excellent thermal performance characteristics and allows effective thermal integration with a fuel cell. The invention further relates to a plate-type reformer
20 which may be operated either as a steam reformer or as a partial oxidation reformer. When operating as a steam reformer it receives heat from a source such as a fuel cell, and receives steam from a source such as the exhaust of a fuel cell. The steam can be externally supplied from any conventional source, such as a steam boiler, or can be supplied by manifolding the exhaust of a conventional fuel cell to the reformer.
25 The heat source can also be a combustion reactor. When operating as a partial oxidation reformer it combusts a relatively small portion, e.g., about 25%, of the incoming reactant gas to provide heat for the endothermic reforming reaction. The reformer is preferably capable of operating at an autothermal balanced condition which requires no other thermal input (heat source) nor steam supply. It is further
30 capable of operating at a partial oxidation condition which is able to utilize the waste heat from a fuel cell.

Another object of the invention is to provide a plate-type reformer in which the catalyst is in intimate thermal contact with thermally conducting plates oriented, e.g., elongated, in the direction of the gas flow so that an average in-plane plate
35 temperature is maintained to allow effective reforming reaction, as well as to eliminate or reduce the occurrence of hot spots which would be detrimental to the

catalysts or structure materials of the reformer. The term "in-plane" is intended to mean the flat surfaces or side of the plate.

Still another object of the invention is to provide a plate-type reformer which is capable of utilizing the waste heat provided by the fuel cell for its endothermic reactions, either in steam reforming or in partial oxidation reforming.

Yet, another object of the invention is to provide a plate-type reformer which pre-heats the incoming reactants to a temperature suitable for reforming.

Another object of the invention is to provide a plate-type reformer in which multiple inlet manifolds are provided so that the reactants may be introduced to the reformer separately, and which are then thoroughly mixed within the reformer, before entering the oxidation section and the reformer section of the reformer.

The reformer of the present invention employs a thermal enhancement feature which promotes efficient fuel reformation. According to one aspect, the reformer includes a planar catalyst configuration having interleaved thermally conducting plates. The latter feature greatly enhances the thermal characteristics of the reformer, resulting in a relatively compact reformer design. Hence, the reformer can be thermally and physically integrated with an electrochemical converter for efficiently reforming hydrocarbon fuel and generating electricity.

The invention overcomes the size disadvantages of conventional reformers by utilizing the foregoing efficient heat transfer techniques to achieve temperature uniformity (isothermal surfaces) and energy balance in the system. This temperature uniformity reduces the amount of reforming material necessary to reform the incoming reactants. Furthermore, the thermal energy required by the endothermic reforming reactions is derived from the waste heat of the thermally integrated electrochemical converter. For example, under normal operating conditions the converter generates excess or waste heat, which is used to support an operating temperature consistent with that required for reforming (in the range between about 500°C and about 700°C). Compactness and manifold simplicity are essential to provide a basis for economical reformer construction and system integration.

Other general and more specific objects of the invention will in part be obvious and will in part be evident from the drawings and description which follow.

Brief Description of the Drawings

The foregoing and other objects, features and advantages of the invention will be apparent from the following description and apparent from the accompanying drawings, in which like reference characters refer to the same parts throughout the

different views. The drawings illustrate principles of the invention and, although not to scale, show relative dimensions.

FIG. 1 is a cross-sectional view of one embodiment of an external fuel reformer according to the present invention;

5 FIGS. 2A-2C are cross-sectional views of various embodiments of the catalyst and reforming plates of FIG. 1.

FIG. 3 is an isometric view of an assembled electrochemical converter with internal reforming capability;

10 FIG. 4 is a more detailed isometric view of the electrolyte component and the interconnector component of an electrochemical converter allowing internal reforming;

FIG. 5 is a cross-sectional assembled view of the electrolyte component and interconnector component according to the invention illustrating the flow of reactants therethrough of external manifold; and

15 FIG. 6 graphically illustrates that the interconnector plates provide the heat transfer function among the endothermic reforming strip and the exothermic combustion strip and the exothermic fuel cell strip, resulting in an isothermal in-plane temperature.

20 Description of Illustrated Embodiments

FIG. 1 is a cross-sectional view of the reformer 10 of the present invention. The reformer 10 includes a number of thermally conductive plates 12 and reforming plates 14 that are alternately stacked together to form a stacked reforming structure 13 that extends along axis 28. The reformer includes a fluid conduit 16 that is in
25 fluid communication with the inner portions 12A, 14A of the plates 12, 14. The reformer 10 is preferably housed within a gas-tight enclosure or housing 20. The illustrated reformer can be used to perform both steam and oxidation reforming. The heat necessary for the reforming process can be supplied internally by partial oxidation of hydrocarbon fuel or supplied externally by a remote heat source, as
30 shown by wavy lines 26, to the reformer 10 by radiation, conduction or convection.

The reactant to be reformed by the reformer 10 is introduced into the apparatus through the axial fluid manifold 16. The reactant preferably comprises a mixture of a hydrocarbon fuel and a reforming agent, such as air, oxygen, water or CO₂, that are premixed either prior to introduction to the manifold 16 or within the
35 reformer. The illustrated reformer 10 includes at least one manifold that delivers a fuel/reforming agent mixture to the reformer, rather than provide separate input

manifolds for each gas constituent. The introduction of a premixed reactants to the reformer 10 provides for a relatively simple design.

The reactant mixture 22 is introduced to the manifold 16 by any appropriate means, such as by fluid conduits. The mixture 22 enters the inner portions of the reformer through reactant passages 24 that are formed between the adjacent
5 conductive plates 12 and reforming plates 14. The passages can comprise any surface indentation or protrusions, which can be formed by embossing, and which constitutes a substantially continuous fluid passage that extends from the manifold 16 to the outer peripheral surface 13A of the stacked reforming structure 13. The
10 passages can also be formed by utilizing conductive or reforming plates that are made of a porous material or have a power reformer catalyst material coated or formed thereon, thus allowing the reactant to pass through the reformer.

Examples of these various plate arrangements and configurations are illustrated in FIGS. 2A-2C. FIG. 2A illustrates the stacked arrangement of the
15 reformer plates 14 and conductive plates 12. The reformer plates preferably have formed thereon a reformer catalyst material 36 that intimately contacts the conductive plate 12. The illustrated conductive plate 12 is embossed to form reactant flow channels. The mixture 22 is introduced to the axial manifold 16 and enters the reactant channels, where it exits the stacked plate reformer at the
20 peripheral edges thereof.

The reformer catalyst material can be composed of a solid or porous material. FIG. 2B illustrates the mixture flow through the reformer 10 when using a porous reforming material. The use of a porous reforming material relaxes the embossing requirements of the illustrated reformer.

25 In another embodiment, as illustrated in FIG. 2C, the reformer 10 includes a plurality of stacked plates 38 or simply a columnal structure that are formed of a composite of thermally conductive material and a reforming material. This composite plate 38 can be achieved by interspersing a suitably thermally conductive material in admixture with a suitable reforming material. The resultant stacked
30 structure operates substantially identical to the stacked reforming structure 13 shown in FIGS. 1, 2A and 2B and described above.

Those of ordinary skill will recognize that other embodiments of the reformer 10 exists, such as where the reforming plates 14 are composed of a porous material and have a reforming catalyst material disposed therein or coated thereon. The use
35 of porous materials is one of the advantages of the present external reformer since it

relaxes the gas-tight requirements of the reforming system without sacrificing efficiency.

The reactant mixture is reformed within the stacked reforming structure 10 as the reactant passes through the reactant passages and over or through the reforming plates 14. The catalyst material associated with the reforming plates 14 promotes the reforming of the hydrocarbon fuel into simpler reaction species. The stream of reactant mixture introduced to the manifold 16 can comprise H_2O , O_2 , and CO_2 , in addition to a hydrocarbon fuel. For example, methane (CH_4) can be catalytically reformed into a mixture of hydrogen, water, carbon monoxide and carbon dioxide.

When operating the reformer as a steam reformer, it receives a reactant gas mixture containing natural gas (or methane) and steam. Steam reforming catalyst can be formed on the reformer plate in a circumferential band. Thermal energy for the reforming reaction is preferably conducted radially inward from the gas-tight enclosure by the conductive plates 12. The thickness and thermal conductivity of the conductive plates are selected to provide sufficient heat flow radially (or in-plane) to provide heat for the endothermic reforming reaction. The conductive plate can include an integral extension which protrudes into the axial reactant manifold 16 for preheating the incoming reactants, as described in further detail below.

When operating the reformer as a partial oxidation reformer, it receives a reactant gas mixture containing natural gas (or methane) and air or oxygen. One or more types of reforming catalyst material can be distributed in circumferential bands on the reformer plate. According to one aspect, the plate can include an inner band which contains a combustion catalyst 92, and a radially outer band 90 which contains catalyst to promote reforming of methane by water vapor (steam reforming) and by carbon dioxide. Thermal energy for these endothermic reforming reactions is conducted radially from the combustion band to the reforming band by the plate 12. Catalysts for other reactions, such as conventional shift reactions that convert CO in the presence of H_2O to form H_2 and CO_2 may also be incorporated. The thickness and thermal conductivity of the conductive plates 12 are selected to provide sufficient heat flow radially between the inner combustion band and the outer reforming band to supply heat energy for the endothermic reforming reactions. The conductive plates 12 also provide sufficient heat flow radially from the combustion band to pre-heat the incoming reactants at the inlet passages 24 to near operational temperatures, e.g., at least about $300^\circ C$. The thermal energy of the system is preferably transferred from the external source to the reformer 10 through the gas-tight enclosure 20.

The illustrated reformer 10 can be used to reform reactants such as alkanes (paraffin hydrocarbons), hydrocarbons bonded with alcohols (hydroxyls), hydrocarbons bonded with carboxyls, hydrocarbons bonded with carbonyls, hydrocarbons bonded with alkenes (olefin hydrocarbons), hydrocarbons bonded with ethers, hydrocarbons bonded with esterhydrocarbons bonded with amines, hydrocarbons bonded with aromatic derivatives, and hydrocarbons bonded other organo-derivatives.

The band of reforming material of the reformer 10 can be located and mixed in varying proportions to maximize the production of reformed gas.

10 The reforming plate 14 can be composed of any suitable reforming catalytic material that operates at temperatures in the range between about 200°C and about 800°C. Examples of the types of material that can be used include platinum, palladium, chromium, chromium oxide, nickel, nickel oxide, nickel containing compounds, and other suitable transition metals and their oxides. The reforming
15 plate 14 can further include a ceramic support plate that has a reforming material coated thereon, as illustrated in FIGS. 2A and 2B. Thus, the reforming plate 14 of the present invention can include any multi-stacked reforming plate structure that includes suitable reforming catalysts that promote the reformation of a hydrocarbon fuel into suitable reaction species.

20 The conductive plate 12 can be formed of any suitable thermally conductive material, including metals such as aluminum, copper, iron, steel alloys, nickel, nickel alloys, chromium, chromium alloys, platinum, and nonmetals such as silicon carbide, and other composite materials. The thickness of the conductive plate 12 can be selected to maintain a minimum temperature gradient in-plane of the plate 12 and
25 to thereby provide an isothermal region for optimum reforming reaction and to alleviate thermal stress in the reforming plates 14. The conductive plate 12 preferably forms a near isothermal condition in-plane of each plate 12. The isothermal surface formed by the conductive plate 12 improves the efficiency of the overall reforming process by providing a substantially uniform temperature and
30 supply of heat over the surface of the plate for reforming.

Furthermore, the conductive plates form an isothermal condition along the axis of the stack (along the outer peripheral surface of the stacked reformer 13) by the uniform distribution of the reactant mixture through the reactant passages, thereby preventing cold or hot spots from developing along the stack. This improves
35 the thermal characteristics of the reformer 10 and improves the overall performance of the system. As used herein, the term "isothermal" condition or region is intended

to include a substantially constant temperature that varies only slightly in an axial or in-plane direction. A temperature variation of about 50°C is contemplated by the teachings of the present invention.

5 The reformed fuel or reaction species is exhausted along the peripheral portion 13A of the stacked reforming structure 13, as indicated by wavy lines 30. The peripheral exhausting of the reaction species, e.g., reformed fuel products allows relatively easy manifolding of the reactants. The exhausted fluid media are then collected by the gas-tight housing 20 and exhausted therefrom through exit conduits 32. The gas-tight housing 20 thus serves as a peripheral manifold.

10 In an alternate embodiment, the reactant mixture 22 can be introduced into the peripheral manifold formed by the housing 20 and then into the stacked reforming structure 13 along the peripheral edge. The reactant flows radially inward across the reforming and conductive plates 14, 12 and is discharged through the axial manifold 16.

15 The ability to vent the reformed reactant mixture at least at a substantial portion of the periphery of the stack, and preferably from nearly the entire periphery, provides for an exposed peripheral surface devoid of a gas-tight seal or insulating material. Hence, the external reformer 10 of the present invention achieves a compact, simple, elegant external reforming design.

20 The gas-tight enclosure 20 is preferably composed of a thermally conductive material, such as metal. In the illustrated embodiment, the gas-tight enclosure 20 radiantly receives heat energy from an external heat source and further radiantly transfers this heat energy to the stack 13 and thus to the conductive plates 12. The plates 12 supply the heat energy necessary for the reforming reaction by
25 conductively transferring the heat from the outer peripheral surface 13A of the stack 13 inwardly towards the reactant manifold 16.

In another embodiment, the outer surface of the reforming structure 10 contacts the inner surface of the gas-tight housing, which serves to conductively transfer the heat energy to the conductive plates.

30 The gas-tight enclosure of cylindrical configuration is particularly suitable for pressurized reformer operation. The pressure within the vessel is preferably between about ambient and about 50 atm.

The technique for achieving axial reactant flow distribution uniformity is as follows. The reactant flow passages 24 are designed to ensure that the total reactant
35 flow pressure drop in the reactant passages is significantly greater than or dominates the reactant flow pressure drop in the reactant manifold 16. More specifically, the

flow resistance of the passages 24 is substantially greater than the flow resistance of the axial manifold 16. According to a preferred practice, the reactant flow pressure within the passages 24 is about ten times greater than the reactant flow pressure within the manifold. This pressure differential ensures an axial and azimuthal
5 uniform distribution of reactant along the reactant manifold 16 and the reactant passages 24 and essentially from top to bottom of the reformer stack 13. The uniform flow distribution ensures a uniform temperature condition along the axis of the reforming structure 10.

According to a preferred embodiment, the stacked reforming structure 13 is a
10 columnal structure, and the plates have a diameter between about 1 inch and about 20 inches, and has a thickness between about 0.002 inch and about 0.2 inch. The term columnal as used herein is intended to describe various geometric structures that we stacked along a longitudinal axis and have at least one internal reactant manifold which serves as a conduit for a reactant mixture.

15 Those of ordinary skill will appreciate that other geometric configurations can be used, such as rectangular or rectilinear shapes with internal or external manifolds. The plates having a rectangular configuration can be stacked and integrated with attached external manifolds for the supply and the collection of the reactant and reforming resultant species.

20 The relatively small dimensions of the plates 12, 14 of the reformer 10 provide for a compact plate-type reformer that reforms a hydrocarbon fuel into suitable reaction species, and which is easily integratable with existing power systems and assemblies. The illustrated reformer 10 can be thermally integrated with an electrochemical converter, such as a solid oxide fuel cell. In the special
25 application where the reformed fuel is introduced into the fuel cell, the required heat of reaction is supplied from the waste heat generated by the fuel cell.

According to another practice of the present invention, the reformer structure of Figure 1 can also function as a plate-type burner. Specifically, hydrocarbon fuel can be oxidized in the presence of air or other oxidants with or without a suitable
30 catalyst material. The burner embodiment of the present invention includes a conductive plate 12 and a catalyst plate 14 that are alternately stacked together, as described above in relation to the reformer of Figure 1. The burner can employ an input manifold 16 to introduce the incoming reactant to the burner. The incoming reactants can comprise a hydrocarbon fuel and an oxidant, such as air. The
35 hydrocarbon fuel and oxidant can be separately manifolded to the burner or can be premixed. For example, if substantially gas-tight materials are used to form the

plates 12, 14, the reactants are premixed either prior to introduction to the burner or within the input manifold. Conversely, if either plate is formed of a porous material, the reactants can be separately manifolded. The reactants passing across the porous material of the plate then pass therethrough and mix with the other reactant within the reactant passages. The combusted or oxidized reactant is then discharged about the periphery of the burner stack. The oxidized reactant or the resultant species includes CO_2 , H_2O and other stable combustion products depending upon the type of fuel.

The conductive plate of the burner is identical to that of the reformer and functions to conductively transfer heat in-plane of the plate to form an isothermal surface. The thickness of the conductive plate is designed to maintain a minimum temperature gradient in-plane of the plate to provide an isothermal region for optimum combustion reaction to produce reduced NO_x , if air is used as the oxidant, and to alleviate thermal stress in the catalyst plates 14.

Furthermore, the isothermal condition can be maintained by the uniform distribution of reactants of along the axis of the stack, thus preventing cold hot spots from developing along the stack. This improves the overall thermal characteristics of the burner and improves the overall operating performance of the burner.

The illustrated burner further includes reactant flow passages 24, as set forth above in conjunction with the reformer 10. The reactant passages 24 are designed to ensure that the total reactant flow pressure drop in the reactant passages 24 is significantly greater than the reactant flow pressure drop in the reactant manifold 16. More specifically, the flow resistance the passages 24 is substantially greater than the flow resistance in the axial manifold 16. This pressure differential ensures an axial and azimuthal uniform distribution of reactant throughout the axial length of the burner.

The oxidized reactant can be discharged about the peripheral portion of the burner. The exhausted fluid mediums can be captured by a gas-tight housing 20 that surrounds the burner.

In an alternate embodiment, the burner can include a plurality of stacked plates that are formed of a composite of a thermally conductive material and a catalyst material. This composite plate can be achieved by interspersing a suitable thermally conductive material in admixture with a suitable catalytic material. The resulting stacked structure operates substantially identical to the stacked reforming structure 13 shown in Figure 1 and described above.

In an alternate embodiment, the burner can include a cylindrical column that is formed of a composite of a thermally conductive material and a catalyst material by interspersing a suitably thermally conductive material in admixture with a suitable catalytic material. The resulting reforming structure operates substantially identical to the stacked reforming structure 13 shown in Figure 1 and described above.

All other features discussed above in relation to the reformer are equally applicable to the burner.

FIG. 3 shows an isometric view of a reformer incorporated internal to an electrochemical converter according to a preferred embodiment of the invention. The internal reforming electrochemical converter 40 is shown consisting of alternating layers of an electrolyte plate 50 and an interconnector plate 60. The interconnector plate is typically a good thermal and electrical conductor. Holes or manifolds formed in the structure provide conduits for the fuel and oxidizer gases, e.g., input reactants. Reactant flow passageways formed in the interconnector plates, FIG. 4, facilitate the distribution and collection of these gases.

The plates 50, 60 of the internal reforming electrochemical converter 40 are held in compression by a spring loaded tie-rod assembly 42. The tie-rod assembly 42 includes a tie-rod member 44 seated within a central oxidizer manifold 47, as shown in FIG. 4, that includes an assembly nut 44A. A pair of endplates 46 mounted at either end of the internal reforming electrochemical converter 40 provides uniform clamping action on stack of alternating interconnector and electrolyte plates 50, 60 and maintains the electrical contact between the plates and provides gas sealing at appropriate places within the assembly.

FIGS. 3 through 5 illustrate the basic cell unit of the electrochemical converter 40, which includes the electrolyte plate 50 and the interconnector plate 60. In one embodiment, the electrolyte plate 50 can be made of a ceramic material, such as a stabilized zirconia material $\text{ZrO}_2(\text{Y}_2\text{O}_3)$, an oxygen ion conductor, and a porous oxidizer electrode material 50A and a porous fuel electrode material 50B which are disposed thereon. Exemplary materials for the oxidizer electrode material are perovskite materials, such as $\text{LaMnO}_3(\text{Sr})$. Exemplary materials for the fuel electrode material are cermets such as ZrO_2/Ni and ZrO_2/NiO .

The interconnector plate 60 preferably is made of an electrically and thermally conductive interconnect material. The materials suitable for interconnector fabrication include metals such as aluminum, copper, iron, steel alloys, nickel, nickel alloys, chromium, chromium alloys, platinum, platinum alloys, and nonmetals such

as silicon carbide, $\text{La}(\text{Mn})\text{CrO}_3$, and other electrically conductive materials. The interconnector plate 60 serves as the electric connector between adjacent electrolyte plates and as a partition between the fuel and oxidizer reactants. Additionally, the interconnector plate 60 conductively transfers heat in-plane (e.g., across the surface) of the plate to form an isothermal surface, as described in further detail below. As best shown in FIG. 4, the interconnector plate 60 has a central aperture 62 and a set of intermediate, concentric radially outwardly spaced apertures 64. A third outer set of apertures 66 are disposed along the outer cylindrical portion or periphery of the plate 60.

The interconnector plate 60 can have a textured surface. The textured surface 60A preferably has formed thereon a series of dimples, which are formed by known embossing techniques and which form a series of connecting reactant flow passageways. Preferably, both sides of the interconnector plate have the dimpled surface formed thereon. Although the intermediate and outer set of apertures 64 and 66, respectively, are shown with a selected number of apertures, those of ordinary skill will recognize that any number of apertures or distribution patterns can be employed, depending upon the system and reactant flow and manifold requirements.

Likewise, the electrolyte plate 50 has a central aperture 52, and a set of intermediate and outer apertures 54 and 56 that are formed at locations complementary to the apertures 62, 64 and 66, respectively, of the interconnector plate 60.

As shown in FIG. 4, a reactant flow adjustment element 80 can be interposed between the electrolyte plate 50 and the interconnector plate 60. The flow adjustment element 80 serves as a fluid-flow impedance between the plates 50, 60, which restricts the flow of the reactants in the reactant flow passageways. Thus, the flow adjustment element 80 provides for greater uniformity of flow. A preferred flow adjustment element is a wire mesh or screen, but any suitable design can be used provided it serves to restrict the flow of the reactants at a selected and determinable rate.

Referring to FIG. 4, the electrolyte plates 50 and the interconnector plates 60 are alternately stacked and aligned along their respective apertures. The apertures form axial (with respect to the stack) manifolds that feed the cell unit with the input reactants, and that exhaust spent fuel. In particular, the central apertures 52, 62 form input oxidizer manifold 47, the concentric apertures 54, 64 form input fuel manifold 48, and the aligned outer apertures 56, 66 form spent fuel manifold 49.

The absence of a ridge or other raised structure at portion of the periphery of the interconnector plate provides for exhaust ports that communicate with the external environment. The reactant flow passageways connect, fluidwise, the input reactant manifolds 47 and 48 with the outer periphery of the reformer 40, thus
5 allowing the reactants to be exhausted externally of the converter.

The internal reforming electrochemical converter is a stacked plate assembly of cylindrical configuration, and at least one of the electrolyte plate and the conductive plate has a diameter between about 1 inches and about 20 inches, and has a thickness between about 0.002 inches and about 0.2 inches.

10 The internal reforming electrochemical converter 40 of this invention has incorporated therein additional features as described below. The internal reforming operation when performed in the presence of steam receives a reactant gas mixture containing natural gas (or methane) and steam. A steam reforming catalyst 90, (FIG. 5) is distributed in a circumferential band that precedes the fuel electrode material
15 50B on the electrolyte plate 50. Thermal energy for the reforming reaction is conducted radially by the plate 60 to the reforming band. The thickness and thermal conductivity of the plates is designed to provide sufficient heat flow radially between the inner reforming band 90 and the outer fuel cell band (e.g., band 50B) to provide heat energy for the endothermic reforming reaction and to pre-heat the incoming
20 reactants.

The internal reforming can also be performed by a partial oxidation reaction. In this mode, the illustrated converter 40 receives a reactant gas mixture containing natural gas (or methane) and air or oxygen. One or more types of catalyst are distributed in circumferential bands preceding the fuel electrode 50B on the
25 electrolyte plate 50. As shown in FIG. 5, the electrolyte plate includes an inner band that contains a combustion catalyst 92, a radially outer band 90 that contains catalysts to promote reforming of methane by water vapor (steam reforming) and by carbon dioxide. Thermal energy for these endothermic reforming reactions is conducted radially from the combustion band 92 to the reforming band 90. Catalysts
30 for other reactions, e.g. shift reactions etc. may also be incorporated. The thickness and thermal conductivity of the conductive plates is designed to provide sufficient heat flow radially between the inner combustion band 90 and the radially outer reforming band 90 to provide the endothermic reaction energy and to pre-heat the incoming reactants. Additional thermal energy can be obtained from the exothermal
35 fuel cell reaction performed by the fuel electrode 50B illustrated as an outermost band along the diameter of the plate.

In the illustrated electrochemical converter 40, the combustion catalyst 92, the reforming catalyst 90 and a shift catalyst (which can be also applied as a band radially outward of the reforming catalyst 80) can also be applied on the flow adjustment element, which is situated between the electrolyte plate and the
5 conductive plate.

The reformer may apply the catalysts which are mixed in varying proportions radially to maximize the production of product gas.

All of the reforming features discussed above in relation to the external reformer and band are equally applicable to this internal reforming electrochemical
10 converter. For example, the interconnector plate 60 can include extended lip portions 72A and 72B, either of which can be used to preheat incoming reactants.

The internal reforming electrochemical converter 40 of the present invention can be a fuel cell, such as a solid oxide fuel cell, molten carbonate fuel cell, alkaline fuel cell, phosphoric acid fuel cell, and proton membrane fuel cell. The preferred
15 fuel cell of the present invention is a solid oxide fuel cell. The internal reforming electrochemical converter 40 of the present invention preferable has an operating temperature above 600°C, and preferably between about 900°C and 1100°C, and most preferably about 1000°C.

Those of ordinary skill will appreciate that the illustrated combustion, reforming and fuel electrode bands are merely representative of relative locations of
20 electrochemical operations that occur during use of the converter 40 as a reformer.

In another embodiment of the invention, the internal reforming electrochemical converter 40 can have any desirable geometric configuration, such as a rectilinear configuration. The stacked structure can thus include rectangular
25 electrolyte plates 50 and rectangular interconnector plates 60 with manifolds attached external to the plates. The catalytic and electrode materials can be applied in strips on the electrolyte plates perpendicular to the reactants flow direction. As illustrated in FIG. 5, the fuel flow 24 is perpendicular to the elongated bands 92, 90 and 50B. The interconnector plates 60 conductively transfer heat energy to the
30 endothermic reforming catalyst band 90, the exothermic combustion catalyst band 92, and the exothermic fuel cell band 50B, resulting in a substantially in-plane isothermal condition, as illustrated in FIG. 6.

FIG. 6 graphically depicts the isothermal temperature condition of the incoming reactants, e.g., hydrocarbon fuel, and reformed fuel established by the
35 thermally conductive plate 60 during its passages over the electrolyte plate 50. The temperature of the fuel during operation is defined by the ordinate axis and the fuel

- 16 -

flow direction is defined by the abscissa. In a reforming structure that does not utilize a thermally conductive plate to transfer heat in-plane during operation, the fuel temperature varies greatly in the direction of fuel flow, as denoted by waveform 110. As illustrated, the incoming fuel is initially preheated, as by the extended surfaces 72A and 72B. This preheating stage 112 corresponds to a rise in the fuel temperature as it approaches the operating temperature of the converter 40. During the exothermic partial oxidation or combustion stage 114, the temperature of the fuel further increases until the fuel flow reaches the reformation stage 116. The endothermic reformation stage requires a significant amount of heat energy to sustain the reforming operation. The fuel then flows to the fuel cell reaction stage 118, where the fuel is again heated, e.g., by the relatively hot operating environment of the converter 40. This sinusoidal like temperature profile 110 of the fuel decreases the overall operating efficiency of the converter, as well as exposes certain components (the electrolyte plate 50) to undesirable thermal stresses. The introduction of the conductive (interconnector) plate within the converter 40 "smoothes" the temperature profile and creates a substantially isothermal temperature condition, in-plane and axially along the converter stack, through all stages of operation as illustrated by the isothermal profile 120.

According to one mode of operation, the internal reforming electrochemical converter catalytically reforms the hydrocarbon fuel with H_2O to produce H_2 and CO, which in turn proceeds to the fuel cell portion (e.g., fuel electrode 50B) for electricity generation. It produces exhaust species H_2O and CO_2 . The heat from the exothermic fuel cell reaction is conductively transferred in-plane to the conducting plates to support the endothermic reforming reaction.

According to another mode of operation, the internal reforming electrochemical converter catalytically oxidizes hydrocarbon fuel to produce H_2 and CO, which proceeds to the fuel cell section for electricity generation. It produces exhaust species H_2O and CO_2 . The heat from the exothermic fuel cell reaction is conductively transferred in-plane to the conductive plates 60 to support the mildly exothermic partial oxidation reforming reaction.

The internal reforming electrochemical converter can be placed in an enclosure designed for pressurized operation.

Another significant feature of the present invention is that the extended heating surfaces 72D and 72C heat the reactants delivered from the oxidizer and fuel external manifolds 47 and 48 to the operating temperature of the converter. Specifically, the extended surface 72D that protrudes into the oxidizer manifold 47

heats the oxidizer reactant, and the extended surface 72C that protrudes into the fuel manifold 48 heats the fuel reactant. The highly thermally conductive interconnector plate 60 facilitates heating of the input reactants by conductively transferring heat from the fuel cell strip to the extended surfaces or lip portions, thus heating the input reactants to the operating temperature. The extended surfaces thus function as a heat fin. This reactant heating structure provides a compact converter that is capable of being thermally integrated into a power system to realize extraordinary system efficiency.

The illustrated electrochemical converter 40 of FIGS. 3-5 is also capable of performing chemical transformation and production, while concomitantly producing electricity in a coproduction operation.

According to this embodiment, the electrochemical converter 40 is adapted to receive electricity from a power source, which initiates an electrochemical reaction within the converter and reduces selected pollutants contained within the incoming reactant into benign species. Hence, for example, the electrochemical converter 40 can be coupled to an exhaust source that contains selected pollutants, including NO_x and hydrocarbon species. The converter 40 catalytically reduces the pollutants into benign species, including N₂, O₂ and CO₂.

It will thus be seen that the invention efficiently attains the objects set forth above, among those made apparent from the preceding description. Since certain changes may be made in the above constructions without departing from the scope of the invention, it is intended that all matter contained in the above description or shown in the accompanying drawings be interpreted as illustrative and not in a limiting sense.

It is also to be understood that the following claims are to cover all generic and specific features of the invention described herein, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

Having described the invention, what is claimed is:

- 18 -

1. A plate-type reformer for reforming a reactant into reaction species during operation, said reformer comprising:
a plurality of catalyst plates having associated therewith one or more catalyst materials for promoting reformation and a plurality of conductive plates formed of a thermally conducting material, said catalyst plates and said conductive plates being alternately stacked to form a reforming structure, the conductive plates conductively transferring heat energy in-plane to support the reforming process.
2. The reformer of claim 1 wherein said reforming process includes one or more reforming reactions, said reforming reactions including a catalytically assisted chemical reaction between two or more reaction species, and a catalytically assisted thermal dissociation of a single species.
3. The reformer of claim 1 wherein said reforming structure includes at least one axial manifold for introducing the reactant thereto and at least one manifold for allowing the reaction species to exit from the reforming structure.
4. The reformer of claim 1 wherein said reforming structure has an exposed peripheral surface for exchanging heat energy with an external environment.
5. The reformer of claim 1 wherein said reforming structure includes at least one axial reactant manifold for introducing the reactant thereto and peripheral exhaust means for exhausting the reaction species from a peripheral portion of the reforming structure.
6. The reformer of claim 1 further comprising
a thermally conductive, gas-tight housing disposed about the stacked reforming structure to form a peripheral axial manifold, and
means for allowing the reaction species to enter the peripheral axial manifold, wherein the reaction species is captured by the gas-tight housing.
7. The reformer of claim 1 further including a thermally conductive, gas-tight housing having means for exchanging heat energy with the external environment and said conductive plate by one of radiation, conduction and convection.

- 19 -

8. The reformer of claim 1 wherein an outer surface of the reforming structure contacts an inner surface of a gas-tight housing, said gas-tight housing being capable of conductively transferring heat energy to the conductive plates.
- 5 9. The reformer of claim 1 further comprising a gas-tight enclosure of cylindrical configuration for permitting pressurized reformer operation.
- 10 10. The reformer of claim 1 wherein the conductive plate includes means for providing a generally isothermal condition, in plane of the conductive plate.
- 15 11. The reformer of claim 1 wherein said reforming structure includes at least one axial reactant manifold for introducing the reactant thereto, and wherein the conductive plates includes extension means integrally formed thereon and extending into the axial reactant manifold for preheating an incoming reactant.
- 20 12. The reformer of claim 1 wherein at least one of the conductive plate and the catalyst plate includes an in-plane surface having passage means for allowing the reactant to flow over the surface of the plate.
- 25 13. The reformer of claim 1 further including
an axial manifold formed within the reforming structure,
passage means formed between the conductive plate and the catalyst plate,
and
means for generating a reactant flow pressure drop through the passage
means between the conductive plate and the catalyst plate that is substantially greater
than the reactant flow pressure drop within the axial manifold.
- 30 14. The reformer of claim 1 further including passage means formed between the catalyst and conductive plates for allowing an incoming reactant to pass over a surface of one of the plates, said passage means maintaining a substantially uniform pressure drop to provide for a substantially uniform flow of reactants along an axis of the reforming structure.
- 35 15. The reformer of claim 1 further including means for producing a substantially uniform temperature condition along an axis of the reforming structure.

- 20 -

16. The reformer of claim 1 wherein the catalyst plate is formed of a porous catalyst material, the porous material forming passage means for allowing an incoming reactant to pass through at least a portion of the plate.
- 5 17. The reformer of claim 1 wherein the thermally conductive plate is formed of a porous conductive material, the porous material forming passage means for allowing an incoming reactant to pass through the plate.
- 10 18. The reformer of claim 1 wherein the conductive plate is composed of at least one of a nonmetal such as silicon carbide, and a composite material.
19. The reformer of claim 1 wherein the conductive plate is composed of at least one metal such as aluminum, copper, iron, steel alloys, nickel, nickel alloys, chromium, chromium alloys, platinum, and platinum alloys.
- 15 20. The reformer of claim 1 wherein the catalyst plate is composed of a ceramic support plate having the catalyst material coating.
- 20 21. The reformer of claim 1 wherein the catalyst material is selected from the group consisting of platinum, palladium, nickel, nickel oxide, iron, iron oxide, chromium, chromium oxide, cobalt, cobalt oxide, copper, copper oxide, zinc, zinc oxide, molybdenum, molybdenum oxide, and other suitable transition metals and their oxides.
- 25 22. The reformer of claim 1 wherein the catalyst plate is composed of at least one of platinum, nickel, nickel oxide, chromium and chromium oxide.
23. The reformer of claim 1 wherein the reactant includes a hydrocarbon species, and at least one of O_2 , H_2O and CO_2 .
- 30 24. The reformer of claim 1 wherein the reactant includes at least one of an alkane, a hydroxyl, a hydrocarbon bonded with a carboxyl, a hydrocarbon bonded with a carbonyl, an olefin hydrocarbon, a hydrocarbon bonded with an ether, a hydrocarbon bonded with an ester, a hydrocarbon bonded with an amine, a hydrocarbon bonded with an aromatic derivative, and a hydrocarbon bonded with another organo-derivative.
- 35

25. The reformer of claim 1 further including means for coupling the reaction species exiting the reformer to an external fuel cell.

5 26. The reformer of claim 23 wherein the hydrocarbon fuel and at least one of H_2O and CO_2 undergo an endothermic catalytic reformation to produce H_2 , CO , H_2O and CO_2 , the energy requirements for the endothermic reforming being supplied by energy produced by an external fuel cell, said energy being transferred from the fuel cell by the conducting plate through in-plane thermal conduction.

10

27. The reformer of claim 23 wherein the hydrocarbon fuel and O_2 undergo catalytic combustion and reformation to produce H_2 , CO , H_2O and CO_2 , and at least one of an exothermic combustion and an exothermic reaction of an external fuel cell supplementing the energy requirements for the endothermic reforming through the in-plane thermal conduction of the conducting plate.

15

28. The reformer of Claim 23 or 24 wherein the CO and H_2O undergo catalytic shift reaction to form CO_2 and H_2 .

20 29. The reformer of claim 1 wherein the reforming structure has a substantially cylindrical shape.

30. The reformer of claim 1 wherein the reforming structure is cylindrical and at least one of the catalyst plate and the conductive plate has a diameter between about 1 inch and about 20 inches, and has a thickness between about 0.002 inch and about 0.2 inch.

25

31. The reformer of claim 1 wherein the reforming structure has a substantially rectangular shape.

30

32. A reformer for reforming a reactant into reaction species during operation, said reformer comprising:

a porous and thermally conductive material interspersed with one or more catalyst materials to form a reforming structure, the thermally conductive material transferring heat energy to support the reforming process.

35

33. A plate-type reformer for reforming a reactant into reaction species during operation, said reformer comprising:

a plurality of plates composed of a thermally conductive material interspersed with one or more catalyst materials for promoting the reforming process, said plates being stacked together to form a reforming structure. the plates conductively transferring heat energy in-plane of the plates to support the reforming process.

34. The reformer of claims 32 or 33 wherein said reforming structure includes at least one axial manifold for introducing the reactant thereto and at least one manifold for allowing the reaction species to exit from the reforming structure.

35. The reformer of claims 32 or 33 wherein said reforming structure has an exposed peripheral surface for exchanging heat energy with an external environment.

36. The reformer of claims 32 or 33 wherein said reforming structure includes at least one axial reactant manifold for introducing the reactant thereto and peripheral exhaust means for exhausting the reaction species from a peripheral portion of the reforming structure.

37. The reformer of claims 32 or 33 further comprising a thermally conductive, gas-tight housing disposed about the reforming structure to form a peripheral axial manifold, and means for allowing the reaction species to enter the peripheral axial manifold, wherein the reaction species is captured by the gas-tight housing.

38. The reformer of claims 32 or 33 further including a thermally conductive, gas-tight housing having means for exchanging heat energy with the external environment and said reforming structure by one of radiation, conduction and convection.

39. The reformer of claims 32 or 33 wherein an outer surface of the reforming structure contacts an inner surface of a gas-tight housing, said gas-tight housing being capable of conductively transferring heat energy to the reforming structure.

40. The reformer of claims 32 or 33 further comprising a gas-tight enclosure of cylindrical configuration for permitting pressurized reformer operation.
41. The reformer of claims 32 or 33 wherein the reforming structure includes
5 means for providing a generally isothermal condition through said reforming structure.
42. The reformer of claims 32 or 33 wherein said reforming structure includes at least one axial reactant manifold for introducing a reactant thereto, and wherein the
10 reforming structure includes extension means integrally formed therewith and extending into the axial reactant manifold for preheating the reactant.
43. The reformer of claims 32 or 33 wherein said reforming structure includes
15 passage means for allowing a reactant to flow through the structure.
44. The reformer of claims 32 or 33 further including
an axial manifold formed within the reforming structure,
reactant passage means for allowing a reactant to flow in-plane of the reforming structure, and
20 means for generating a reactant flow pressure drop through the passage means that is substantially greater than the reactant flow pressure drop within the axial manifold.
45. The reformer of claim 43 wherein the passage means maintains a
25 substantially uniform pressure drop to provide for a substantially uniform flow of reactants along an axis of the reforming structure.
46. The reformer of claims 32 or 33 further including means for producing a substantially uniform temperature condition along an axis of the reforming structure.
30
47. The reformer of claims 32 or 33 wherein the conductive material is composed of at least one of a nonmetal such as silicon carbide, and a composite material.

48. The reformer of claims 32 or 33 wherein the conductive material is composed of at least one metal such as aluminum, copper, iron, steel alloys, nickel, nickel alloys, chromium, chromium alloys, platinum, and platinum alloys.
- 5 49. The reformer of claims 32 or 33 wherein the catalyst material is selected from the group consisting of platinum, palladium, nickel, nickel oxide, iron, iron oxide, chromium, chromium oxide, cobalt, cobalt oxide, copper, copper oxide, zinc, zinc oxide, molybdenum, molybdenum oxide, other transition metals and their oxides.
- 10 50. The reformer of claims 32 or 33 wherein the reactant includes a hydrocarbon species, and at least one of O_2 , H_2O and CO_2 .
- 15 51. The reformer of claims 32 or 33 further including means for coupling the reaction species exiting the reformer to an external fuel cell.
52. The reformer of claims 32 or 33 wherein the reactant includes a hydrocarbon fuel and at least one of H_2O and CO_2 which undergo catalytic reformation to produce H_2 , CO , H_2O and CO_2 , and wherein an exothermic reaction of an external
20 fuel cell supplements the energy requirements for the endothermic reforming reaction of the reforming structure through the thermally conductive material.
53. The reformer of claims 32 or 33 wherein the reactant includes a hydrocarbon fuel and O_2 which undergo catalytic combustion and reformation to produce H_2 ,
25 CO , H_2O and CO_2 , and at least one of an exothermic combustion and an exothermic reaction of an external fuel cell supplements the energy requirements for the endothermic reforming reaction of the reforming structure through the thermally conductive material.
- 30 54. The reformer of claims 32 or 33 wherein the reforming structure has a substantially cylindrical shape.
55. The reformer of claims 32 or 33 wherein the reforming structure is cylindrical and has a diameter between about 1 inch and about 20 inches.

- 25 -

56. The reformer of claims 32 or 33 wherein the reforming structure has a substantially rectangular shape.

57. A burner for oxidizing a hydrocarbon fuel to produce heat energy, said
5 burner comprising:

a plurality of conductive plates formed of a thermally conductive material and a plurality of catalyst plates having one or more oxidizing catalyst materials, said catalyst plates and said conductive plates being alternately stacked to form a burner structure;

10 wherein the catalyst material of the catalyst plate promotes the oxidation of the hydrocarbon fuel to form a resultant species; and

wherein the conductive plates are capable of transferring heat energy produced during the oxidation process to the surrounding medium by one of radiation, conduction and convection.

15 58. The burner of claim 57 wherein the burner structure has an exposed peripheral surface for exchanging heat energy with an external environment.

59. The burner of claim 57 wherein said burner structure includes at least one
20 axial reactant manifold for introducing the reactant thereto and peripheral exhaust means for exhausting the reaction species from a peripheral portion of the burner structure.

60. The burner of claim 57 further including a thermally conductive housing
25 disposed about the burner structure and having means for exchanging heat energy with the external environment and said conductive plate by one of radiation, conduction and convection.

61. The burner of claim 57 wherein an outer surface of the burner structure
30 contacts an inner surface of a thermally conductive housing disposed about the burner structure, said housing conductively transferring heat energy from the conductive plates during operation.

62. The burner of claim 57 wherein the conductive plate includes means for
35 providing a generally isothermal condition, in plane of the conductive plate.

- 26 -

63. The burner of claim 57 wherein said burner structure includes at least one axial reactant manifold for introducing the reactant thereto, and wherein the conductive plates include extension means integrally formed thereon and extending into the axial reactant manifold for preheating the hydrocarbon fuel.
- 5 64. The burner of claim 57 wherein an in-plane surface of at least one of the conductive plate and the catalyst plate includes passage means for allowing the hydrocarbon fuel to flow over the surface of the plate.
- 10 65. The burner of claim 57 further including
an axial manifold formed within the burner structure,
passage means formed in an in-plane surface of one of the conductive plate and the catalyst plate for allowing the fuel to flow over the surface of the plate, and
means for generating a reactant flow pressure drop through the passage
15 means that is substantially greater than the reactant flow pressure drop within the axial manifold.
- 20 66. The burner of claim 64 wherein the passage means maintains a substantially uniform pressure drop to provide for a substantially uniform flow of reactants along an axis of the burner structure.
- 25 67. The burner of claim 57 further including means for producing a substantially uniform temperature condition along an outer surface of the burner structure.
- 30 68. The burner of claim 64 wherein the catalyst plate is formed of a porous catalyst material, the porous material forming the passage means and allowing the reactant to pass through the plate.
69. The burner of claim 64 wherein the thermally conductive plate is formed of a porous conductive material, the porous material forming the passage means and allowing the reactant to pass through the plate.
70. The burner of claim 57 wherein the conductive plate is composed of silicon carbide.

35

71. The burner of claim 57 wherein the conductive plate is composed of at least one refractory metal.

72. The burner of claim 57 wherein the catalyst plate is composed of a ceramic support plate having the catalyst material coated thereon.

73. The burner of claim 72 wherein the catalyst coating is selected from the group consisting of at least one of platinum, nickel, nickel oxide, chromium and chromium oxide.

74. The burner of claim 57 wherein the catalyst plate is composed of at least one of platinum, nickel, nickel oxide, chromium and chromium oxide.

75. The burner of claim 57 wherein the hydrocarbon fuel is pre-mixed with an oxidizer reactant prior to introduction to or within the axial manifold.

76. The burner of claim 57 wherein the burner structure has a substantially cylindrical shape.

77. The burner of claim 57 wherein the burner structure is cylindrical and at least one of the catalyst plate and the conductive plate has a diameter between about 1 inch and about 20 inches, and has a thickness between about 0.002 inch and about 0.2 inch.

78. A burner for oxidizing a hydrocarbon fuel to produce heat energy, said apparatus comprising:

a porous and thermally conductive material interspersed with one or more catalyst materials to form a burner structure,

wherein the catalyst material promotes the oxidation of the hydrocarbon fuel to form a resultant species, and

wherein the conductive material is capable of transferring heat energy produced during the oxidation process to the surrounding medium by one of radiation, conduction and convection.

79. A burner for oxidizing a hydrocarbon fuel to produce heat energy, said apparatus comprising:

a plurality of plates composed of a thermally conductive material interspersed with one or more catalyst materials, said plates being stacked together to form a burner structure,

5 wherein the catalyst material promotes the oxidation of the hydrocarbon fuel to form a resultant species, and

wherein the conductive material transferring heat energy produced during the oxidation process to the surrounding medium by one of radiation, conduction and convection.

10 80. An electrochemical converter, comprising:

a plurality of gas-tight electrolyte plates having reactive materials disposed on both sides thereof, said plates having a fuel flow side and having the reactive material disposed thereon selected from the group consisting of at least one of a combustion catalyst, a reforming catalyst, a shift catalyst and a fuel electrode material,

15 said plates having an oxidant flow having the reactive material disposed thereon selected from the group consisting of an oxidant electrode material,

a plurality of gas-tight conductive plates formed of a thermally conductive material; said electrolyte plates and said conductive plates being alternately stacked together to form a stacked plate assembly, and

20 internal reforming means for preheating and reforming a hydrocarbon fuel on the fuel flow side of the electrolyte plate within the stacked plate assembly, said reforming being assisted by the conductive plates which are capable of conductively transferring heat from a fuel cell reaction portion of the stacked plate assembly.

25

81. The electrochemical converter of claim 80 wherein the electrolyte plate forms a medium for an electrolytic ionic transfer action.

82. The electrochemical converter of claim 80 wherein
30 the converter performs chemical transformation and production while consuming oxygen to produce electricity.

83. The electrochemical converter of claim 80 wherein a side of the conductive plate faces the fuel flow side having disposed thereon at least one of the combustion catalyst, the reforming catalyst and the shift catalyst.
35

84. The electrochemical converter of claim 80 wherein at least one of the combustion catalyst, the reforming catalyst and the shift catalyst can be applied on a flow adjustment element, said flow adjustment element being situated between the electrolyte plate and the conductive plate.

5

85. The electrochemical converter of claim 80 further comprising a plurality of axial manifolds formed in the stacked plate assembly, at least one of the manifolds being adapted to receive a hydrocarbon fuel reactant and to allow the fuel to flow over one surface of the electrolyte plate and to exit at the external edge of the plates; and at least one other of said manifolds being adapted to receive an oxidizer reactant and to allow the oxidizer flow over the other side of the electrolyte plate and to exit at the external edge of the plates.

10

86. The electrochemical converter of claim 80 wherein the stacked plate assembly has a rectangular configuration with an edge that is adapted to receive a hydrocarbon fuel reactant, said reactant flowing into the space over one surface of the electrolyte plates and exits from an opposing plate edge; and the third plate edge being adapted to receive an oxidizer reactant that flows into a space over the other surface of the electrolyte plate and exits from a fourth plate edge.

15

20

87. The electrochemical converter of claim 80 wherein said conducting plates include means for regulating the in plane temperature distribution of the stacked plate assembly to attain a substantially in-plane isothermal condition.

25

88. The electrochemical converter of claim 85 wherein said manifolds providing means for regulating the uniform flow distribution into the spaces between the plates along the axis of the stacked assembly to provide an axially isothermal condition.

30

89. The electrochemical converter of claim 80 wherein the thermally and electrically conductive material of the interconnector plate is composed of at least a nonmetal.

35

90. The electrochemical converter of claim 80 wherein the thermally and electrically conductive material of the interconnector plates is composed of at least one of nickel, nickel alloys, chromium, chromium alloys, platinum, and platinum alloys.

91. The electrochemical converter of claim 80 wherein the thermally and electrically conductive material of the interconnector plate is composed of at least one of aluminum, copper, iron, and steel alloys.
- 5 92. The electrochemical converter of claim 80 wherein the fuel electrode is composed of at least one of nickel, a nickel containing compound, chromium and chromium containing compound.
- 10 93. The electrochemical converter of claim 80 wherein the combustion catalyst is composed of at least one of platinum, platinum compound, nickel and nickel compound.
94. The electrochemical converter of claim 80 wherein the reforming catalyst is composed of at least one of nickel, a nickel containing compound, chromium and a chromium containing compound.
- 15 95. The electrochemical converter of claim 80 wherein the reforming catalyst is composed of at least one of platinum, palladium, nickel, nickel oxide, iron, iron oxide, chromium, chromium oxide, cobalt, cobalt oxide, copper, copper oxide, zinc, zinc oxide, molybdenum, and molybdenum oxide.
- 20 96. The electrochemical converter of claim 80 wherein partial oxidation occurs over the combustion catalyst formed on one surface of at least one of the electrolyte plate and the conductive plate.
- 25 97. The electrochemical converter of claim 80 wherein the internal reforming reaction occurs over the reforming catalyst on one surface of one of the electrolyte plate and the conductive plate.
- 30 98. The electrochemical converter of claim 80 wherein the fuel cell reaction occurs over the reactive material of the electrolyte plate.
- 35 99. The electrochemical converter of claim 80 wherein the reforming catalyst and the fuel electrode material are intermixed over the surface of the electrolyte plate to

substantially simultaneously reform the fuel and create electrochemical reaction during operation.

100. The electrochemical converter of claim 80 wherein the combustion catalyst, reforming catalyst and the fuel electrode material are intermixed over the surface of the electrolyte plate to substantially simultaneously initiate partial oxidation and reformation of a fuel reactant.

101. The electrochemical converter of claim 80 wherein a hydrocarbon fuel introduced to the converter catalytically reforms in the presence of H_2O , the fuel to produce H_2 and CO , said reformed fuel being subjected to a fuel cell reaction to form an exhaust species containing H_2O and CO_2 ; wherein the heat from the exothermic fuel cell reaction is conductively transferred in-plane to the conductive plates to support the endothermic reforming reaction.

102. The electrochemical converter of claim 80 wherein a hydrocarbon fuel introduced to the converter catalytically combusts partially with O_2 to produce H_2 and CO , said partially combusted fuel being subjected to an exothermic fuel cell reaction to form an exhaust species containing H_2O and CO_2 , wherein the heat generated from the exothermic fuel cell reaction is conductively transferred in-plane to the conducting plates to provide a temperature sufficient to support the mild exothermic partial oxidation reforming reaction.

103. The electrochemical converter of claim 80 wherein the reactant includes at least one of an alkane hydroxyl, a hydrocarbon bonded with a carboxyl, a hydrocarbon bonded with a carbonyl, an olefin hydrocarbon, a hydrocarbon bonded with an ether, a hydrocarbon bonded with an ester, a hydrocarbon bonded with an amine, a hydrocarbon bonded with an aromatic derivative, and a hydrocarbon bonded other organo-derivatives.

104. The electrochemical converter of claim 80 wherein the converter is a fuel cell selected from the group consisting of solid oxide fuel cell, molten carbonate fuel cell, alkaline fuel cell, proton exchange membrane fuel cell, and phosphoric acid fuel cell.

- 32 -

105. The electrochemical converter of claim 80 wherein the electrolyte plate is composed of one of a zirconia based materials and a ceria based material.
106. The electrochemical converter of claim 80 further including internal reactant
5 heating means disposed within one of the manifolds for heating at least a portion of at least one of said reactants passing through said manifold.
107. The electrochemical converter of claim 106 wherein said internal reactant heating means comprises a thermally conductive and integrally formed extended
10 surface of said conductive plate that protrudes into at least one of said manifolds.
108. The electrochemical converter of claim 107 wherein said fuel cell reaction generates waste heat which heats said reactants to about said operating temperature. said waste heat being conductively transferred to said reactants by said interconnect
15 plate and said extended surface.
109. The electrochemical converter of claim 80 further including peripheral exhaust means for exhausting the reformed fuel from a peripheral portion of the stacked plate assembly.
20
110. The electrochemical converter of claim 80 wherein at least one of the conductive plate and the electrolyte plate includes reactant passage means for allowing the reactant to pass from the axial reactant manifold over the surface of the plates.
25
111. The electrochemical converter of claim 110 wherein the passage means includes means for maintaining a substantially uniform pressure drop over at least one surface of the plates to provide for a substantially uniform flow of reactant over the plate surfaces.
30
112. The electrochemical converter of claim 110 wherein the reactive coating of the electrolyte plate is porous, the porous coating forming the reactant passage means.
113. The electrochemical converter of claim 80 further including means for
35 generating a reactant flow pressure drop through a space formed between the

conductive plate and the opposing electrolyte plate that is substantially greater than the reactant flow pressure drop within the axial manifold.

5 114. The electrochemical converter of claim 80 further including means for producing a substantially uniform radial flow distribution of reactants through said stacked plates.

10 115. The electrochemical converter of claim 80 wherein the stacked plate assembly is cylindrical and at least one of the electrolyte plate and the conductive plate has a diameter between about 1 inches and about 20 inches, and has a thickness between about 0.002 inches and about 0.2 inches.

15 116. The reformer of claim 80 further comprising a gas-tight enclosure of cylindrical configuration configured to surround the stacked plates to permit pressurized reformer operation.

20 117. The electrochemical converter of claim 80 wherein the converter is an electrochemical catalytic converter which is adapted to receive electricity from a remote power source, said electricity initiating an electrochemical reaction within said converter which is adapted to reduce selected pollutants contained within the incoming reactants into benign species.

25 118. The electrochemical converter of claim 116 wherein the catalytic converter further includes means to receive exhaust containing selected pollutants, including NO_x and hydrocarbon species, the catalytic converter including means for reducing the NO_x and the hydrocarbon species into benign species, including one of N₂, O₂ and CO₂.

30 119. A catalytic converter, comprising a plurality of gas-tight converter plates having disposed on a first hydrocarbon gas side a reactive material consisting of one of a converter catalyst and a first electrode material; and disposed on a second buffer gas side a reactive material consisting of a second electrode material;

35 a plurality of gas-tight conductive plates formed of a thermally conductive material; said converter plates and said conductive plates being alternately stacked together to form a converter assembly;

- 34 -

means for introducing a hydrocarbon gas to the hydrocarbon gas side of the converter plate and introducing a buffer gas to the second buffer gas side of the converter plate;

- 5 means for receiving electricity from a remote power source; and
means for converting the hydrocarbon gas into benign species.

120. The converter of claim 19 wherein the conductive plates includes means for attaining a generally isothermal condition in-plane of the conductive plates.

- 10 121. The converter of claim 19 wherein the converter plate is formed of a substantially gas tight electrolyte material.

122. The converter of claim 19 wherein the converter plate is a gas tight ionic conductor.

15

123. The converter of claim 19 wherein the electrode coatings of at least one side of the converter plate includes nickel or a nickel containing compound.


- 20 124. The converter of claim 19 wherein the electrode coatings of at least one side of the converter plate includes platinum.

125. The converter of claim 19 wherein the electrode coating of at least one side of the converter plate includes palladium.

- 25 126. The converter of claim 19 wherein electricity received by said converter initiates an electrochemical reaction which reduce selected pollutants within the hydrocarbon gas into the benign species.

30 127. The converter of claim 19 wherein the assembly is adapted to receive exhaust containing selected pollutants, including NOx and hydrocarbon species, the catalytic converter further including means for reducing the NOx and hydrocarbon species into benign species.

1/4

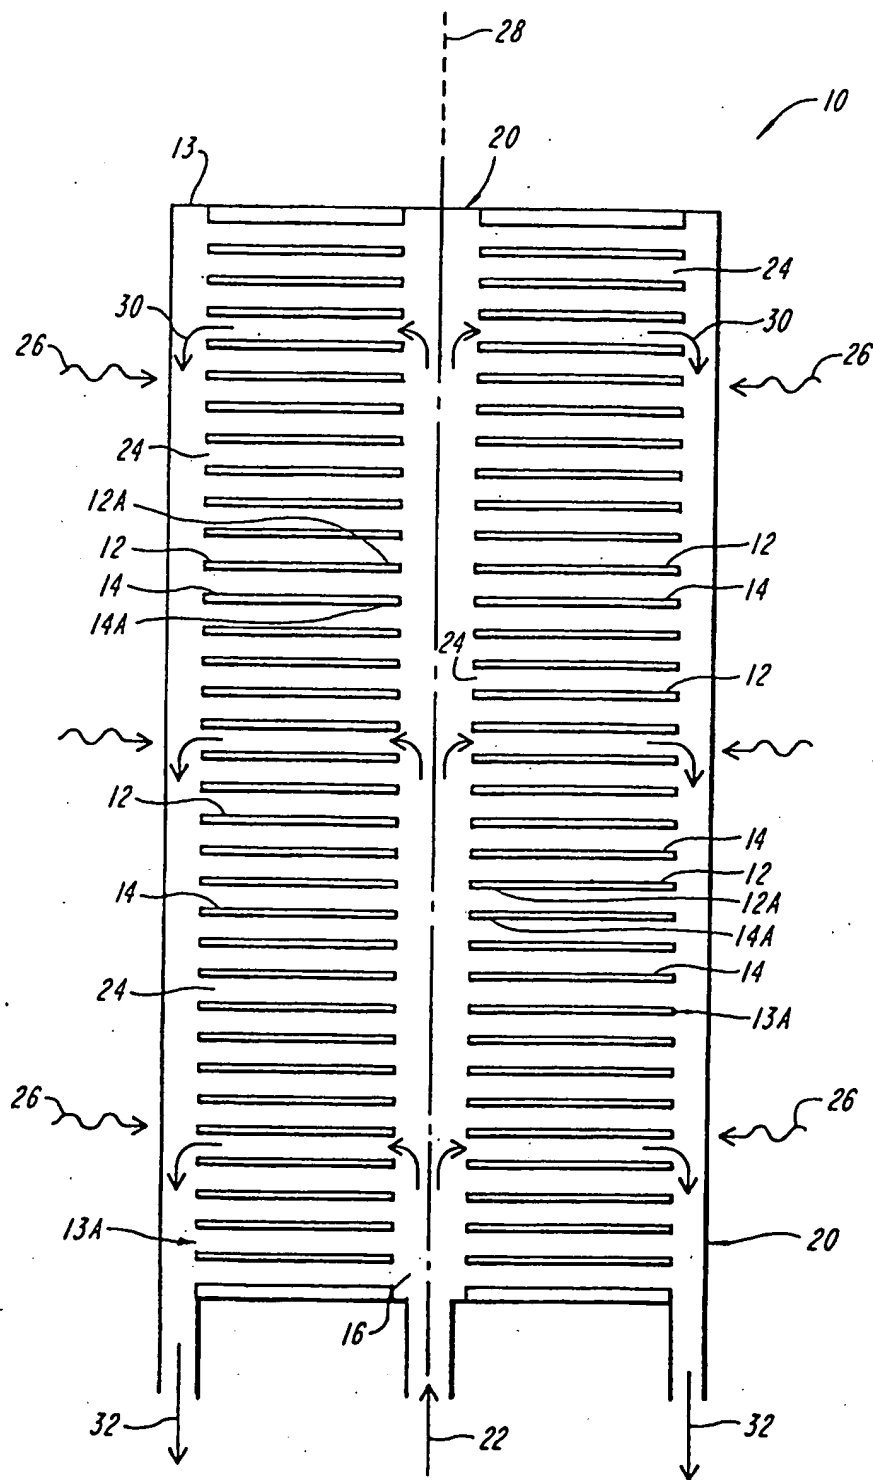**FIG. 1**

SUBSTITUTE SHEET (RULE 26)

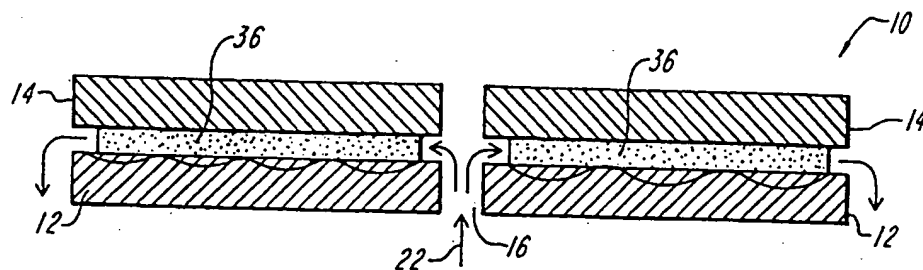


FIG. 2A

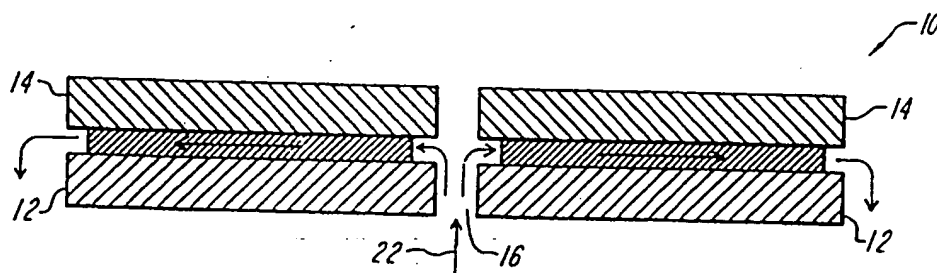


FIG. 2B

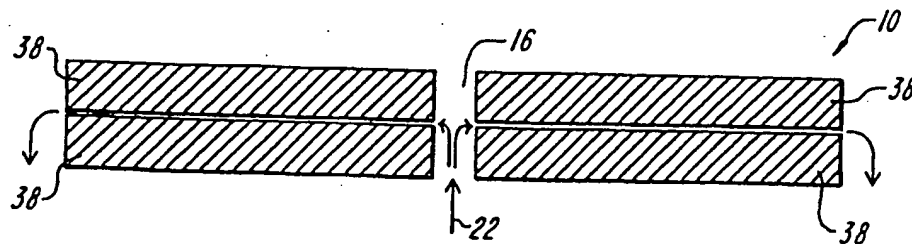


FIG. 2C

3/4

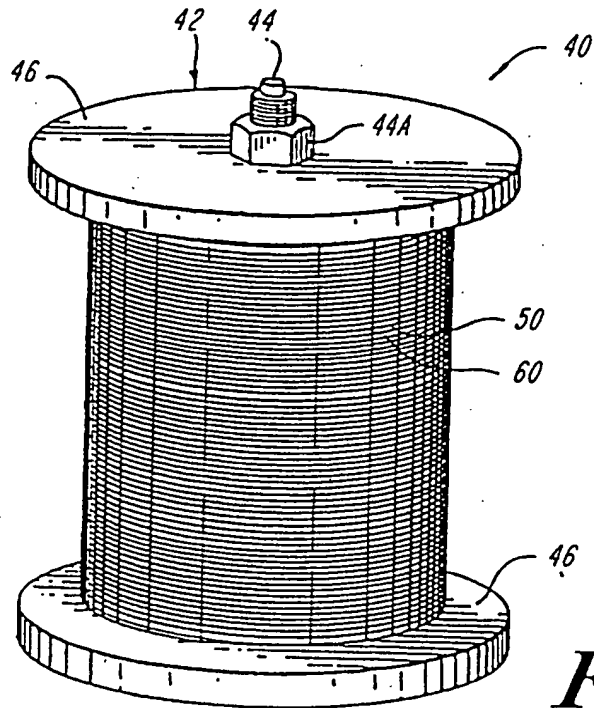


FIG. 3

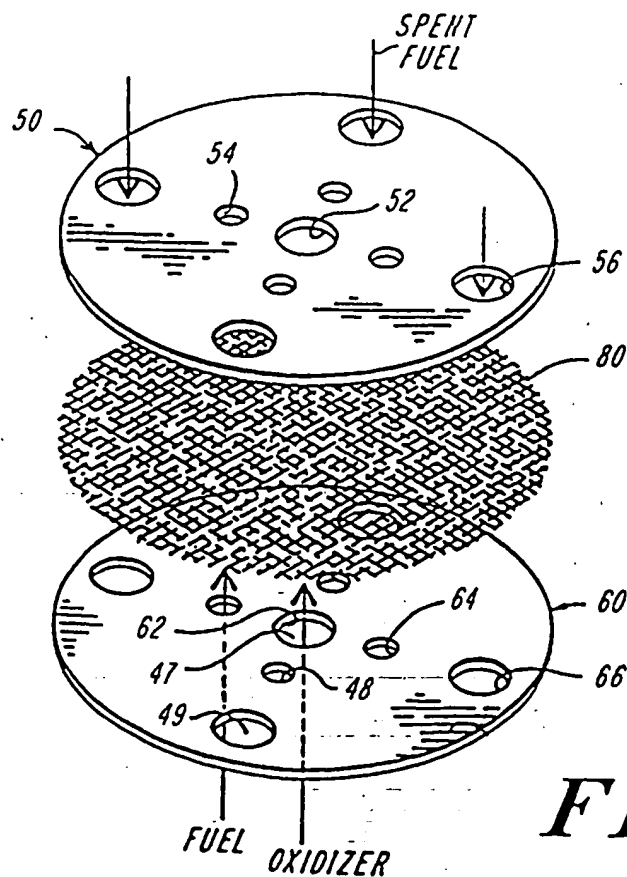


FIG. 4

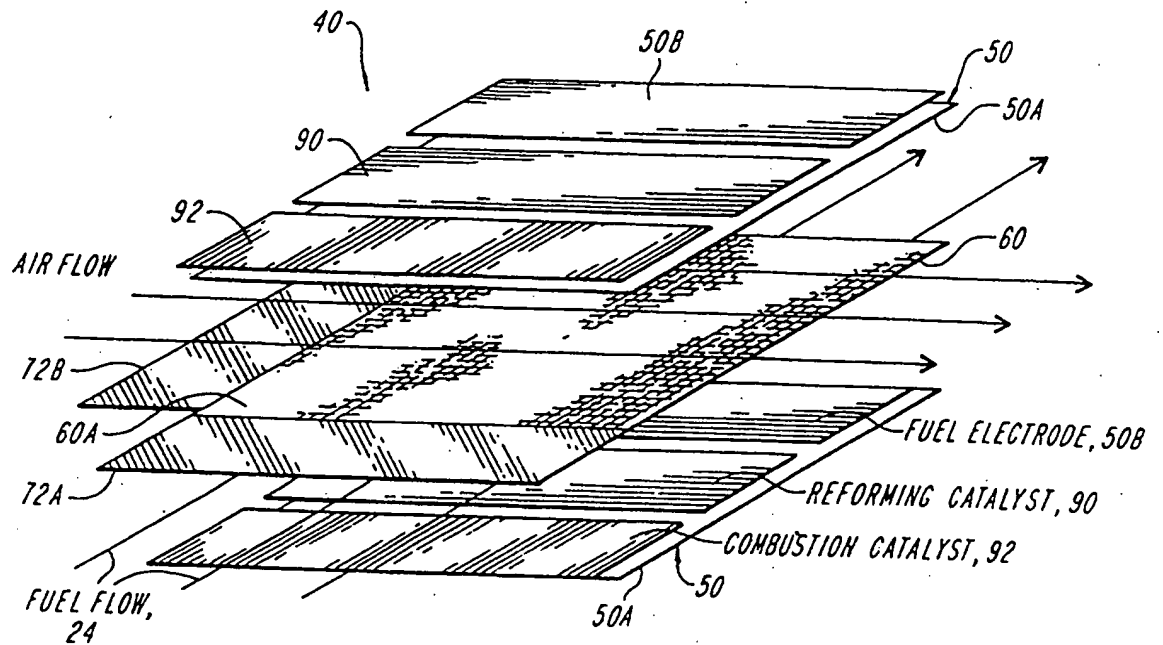


FIG. 5

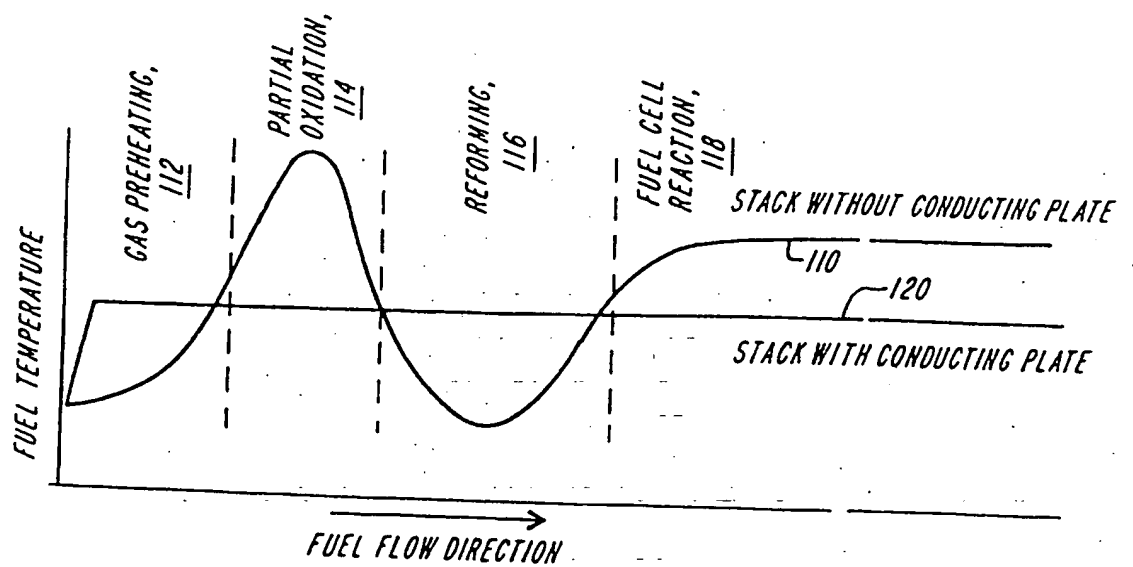


FIG. 6

SUBSTITUTE SHEET (RULE 26)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H01M 8/06, B01J 12/00, B01D 53/32</p>	<p>A3</p>	<p>(11) International Publication Number: WO 97/39490</p> <p>(43) International Publication Date: 23 October 1997 (23.10.97)</p>
<p>(21) International Application Number: PCT/US97/04839</p> <p>(22) International Filing Date: 25 March 1997 (25.03.97)</p> <p>(30) Priority Data: 08/631,432 12 April 1996 (12.04.96) US</p> <p>(71) Applicant: ZTEK CORPORATION [US/US]; 460 Totten Pond Road, Waltham, MA 02154 (US).</p> <p>(72) Inventors: HSU, Michael, S.; Round Hill Road, Lincoln, MA 01773 (US). HOAG, Ethan, D.; 177 Webster Street, East Boston, MA 02128 (US).</p> <p>(74) Agents: LAURENTANO, Anthony, A. et al.; Lahive & Cockfield, L.L.P., 28 State Street, Boston, MA 02109 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p>(88) Date of publication of the international search report: 8 January 1998 (08.01.98)</p>
<p>(54) Title: THERMALLY ENHANCED COMPACT REFORMER</p> <p>(57) Abstract</p> <p>A natural gas reformer (10) comprising a stack of thermally conducting plates (12) interspersed with catalyst plates (14) and provided with internal or external manifolds for reactants. The catalyst plate is in intimate thermal contact with the conducting plates so that its temperature closely tracks the temperature of the thermally conducting plate, which can be designed to attain a near isothermal state in-plane to the plate. One or more catalysts may be used, distributed along the flow direction, in-plane to the thermally conducting plate, in a variety of optional embodiments. The reformer may be operated as a steam reformer or as a partial oxidation reformer. When operated as a steam reformer, thermal energy for the (endothermic) steam reforming reaction is provided externally by radiation and/or conduction to the thermally conducting plates. This produces carbon monoxide, hydrogen, steam and carbon dioxide. When operated as a partial oxidation reformer, a fraction of the natural gas is oxidized assisted by the presence of a combustion catalyst and reforming catalyst. This produces carbon monoxide, hydrogen, steam and carbon dioxide. Because of the intimate thermal contact between the catalyst plate and the conducting plates, no excessive temperature can develop within the stack assembly. Details of the plate design may be varied to accommodate a variety of manifold embodiments providing one or more inlets and exit ports for introducing, pre-heating and exhaust the reactants.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 97/04839

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01M8/06 B01J12/00 B01D53/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01M B01J B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 338 622 A (HSU MICHAEL S ET AL) 16 August 1994 see column 4, line 7 - line 44; claims 1,8-11,23,25-29; figures 1,3,4 --- -/--	1-7,9, 10, 12-14, 23,25, 26,29, 80-83, 85,87, 97,98, 101,104, 109

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

1 August 1997

Date of mailing of the international search report

21.11.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

D'HONDT J.W.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/04839

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 330 751 A (UHDE GMBH) 6 September 1989 see column 3, line 47 - column 4, line 19; claims 12,19; figure 1 see column 1, line 1 - line 8 see column 1, line 28 - line 44 see column 2, line 9 - line 16 ---	32
X	GB 2 210 286 A (ELECTRICITY COUNCIL) 7 June 1989 see page 4, line 21 - page 5, line 15; claims 1,3-5,9-11,15; figures 1,2 see page 7, line 22 - page 8, line 15 see page 2, line 20 - page 3, line 29 ---	32-37, 40,41, 43,44, 46, 48-50,54
X	US 4 174 954 A (DE BUCS EUGEN S ET AL) 20 November 1979 see column 4, line 29 - line 56; claim 1 see column 5, line 35 - column 6, line 21 ---	32,33,53
A	US 1 452 145 A (IVAR WALFRID CEDERBERG) 17 April 1923 see page 1, line 69 - line 87; claim 1; figure 1 ---	32
A	PATENT ABSTRACTS OF JAPAN vol. 012, no. 011 (C-468), 13 January 1988 & JP 62 167203 A (HITACHI LTD), 23 July 1987, see abstract ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 330 (C-0741), 16 July 1990 & JP 02 120206 A (YAMAHA MOTOR CO LTD), 8 May 1990, see abstract ---	32
A	US 2 127 561 A (C. V. HERRMANN) 23 August 1938 see claim 1; figures 1-5 ---	32
A	GB 2 057 908 A (ICI LTD) 8 April 1981 see page 6, line 53 - line 59; claims 1,4,7,8,10; figure 1 ---	1
	-/--	

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/04839

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 05625 A (ZTEK CORP ;HSU MICHAEL S (US); HOAG ETHAN D (US)) 22 February 1996 see claims 16,54-56,59,62; figures 6-8 see page 11, line 17 - page 13, line 14 see page 14, line 12 - line 36	80-83, 85, 87-90, 92,97, 98,101, 104-114, 116
Y	---	84,91, 92,94, 96,102
X	PATENT ABSTRACTS OF JAPAN vol. 016, no. 104 (E-1178), 13 March 1992 & JP 03 283266 A (NKK CORP), 13 December 1991, see abstract	80-84, 87,94, 101,104, 105
Y	& JP 03 283 266 A (NAKAGAWA HIROTAKA) 13 December 1991 ---	84,94
X	US 4 770 955 A (RUHL ROBERT C) 13 September 1988 see column 2, line 48 - column 3, line 12; figures 1,3 see column 4, line 63 - column 5, line 8 see column 3, line 62 - column 4, line 32 see column 4, line 57 - line 62	80-83, 85,87, 88,91, 92,94, 95, 97-99, 101,104, 105,109, 112-115
Y	---	91,92, 96,102
Y	PATENT ABSTRACTS OF JAPAN vol. 012, no. 355 (E-661), 22 September 1988 & JP 63 110557 A (MITSUBISHI HEAVY IND LTD), 16 May 1988, see abstract	96,102
A	---	
	WO 95 26430 A (ZTEK CORP) 5 October 1995 see claims 1-8,17,22,23,26,27; figures 1-4 see page 9, line 11 - line 25 ---	80-82, 86,117, 119

	-/--	

INTERNATIONAL SEARCH REPORT

Internat. Application No.
PCT/US 97/04839

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92 16029 A (BOSSSEL ULF) 17 September 1992 see claim 7; figure 2 ---	80,83
A	EP 0 572 017 A (MURATA MANUFACTURING CO) 1 December 1993 see claim 1 -----	92

INTERNATIONAL SEARCH REPORT

national application No.

PCT/US 97/ 04839

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see annex

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

claims 1-31,32,33-56,80-118

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/ US 97/04839

FURTHER INFORMATION CONTINUED FROM PCT/ISA210

Group I : claims 1-31,32,33-56,80-118 Catalytic steam reformer or partial oxidation reformer, provided with thermally conducting elements near the reforming catalyst, as also its thermal and physical integration in an electrochemical convertor.

Group II : claims 57-77,78,79 Burner for oxidizing a hydrocarbon fuel to produce heat energy.

Group III : 119-127 Electrochemical catalytic device for dissociation of hydrocarbon gas into benign species, particularly electrochemical catalytic reduction of NO_x pollutants in hydrocarbon gas.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/04839

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5338622 A	16-08-94	AU 6497494 A CA 2160358 A CN 1127570 A EP 0694216 A JP 8510352 T NO 954048 A WO 9424716 A	08-11-94 27-10-94 24-07-96 31-01-96 29-10-96 11-12-95 27-10-94
EP 0330751 A	06-09-89	DE 3806408 A	07-09-89
GB 2210286 A	07-06-89	NONE	
US 4174954 A	20-11-79	DE 2558922 A CA 1079971 A FR 2337260 A GB 1527538 A JP 52082905 A	07-07-77 24-06-80 29-07-77 04-10-78 11-07-77
US 1452145 A	17-04-23	NONE	
US 2127561 A	23-08-38	NONE	
GB 2057908 A	08-04-81	CA 1152295 A DK 378780 A EP 0025308 A IN 155027 A JP 56045764 A SU 1102494 A US 4340501 A	23-08-83 07-03-81 18-03-81 22-12-84 25-04-81 07-07-84 20-07-82
WO 9605625 A	22-02-96	US 5501781 A AU 3269795 A CA 2196764 A EP 0776529 A NO 970586 A PL 318546 A	26-03-96 07-03-96 22-02-96 04-06-97 08-04-97 23-06-97
US 4770955 A	13-09-88	AU 602074 B AU 1519488 A CA 1288468 A	27-09-90 03-11-88 03-09-91

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 97/04839

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4770955 A		DE 3869184 A EP 0289226 A JP 1027165 A	23-04-92 02-11-88 30-01-89
WO 9526430 A	05-10-95	AU 2101395 A EP 0746879 A	17-10-95 11-12-96
WO 9216029 A	17-09-92	CH 682270 A AT 127962 T AU 643371 B AU 1272192 A CA 2081779 C DE 59203656 D EP 0527990 A ES 2077402 T US 5338621 A	13-08-93 15-09-95 11-11-93 06-10-92 14-10-97 19-10-95 24-02-93 16-11-95 16-08-94
EP 0572017 A	01-12-93	JP 5326009 A US 5368951 A	10-12-93 29-11-94